


### SELF CENTERING ROTATOR (TWIN DRIVE)

Model	Capacity	No: of unit	Turning	Load brg	Shell diameter		Roller details		Roller, sur- face speed mm/min
	Ton		capacity	capacity	Min:	Max:	Dia:	Width	
			Ton	each unit	mm	mm			
SCR 5	5	1 Drive	5	2.5	400	4000	250	50	150 -1500
		1 Idler	NA	2.5	400	4000	250	50	
SCR 10	10	1 Drive	10	5	400	4000	250	100	150 -1500
		1 Idler	NA	5	400	4000	250	100	
SCR 15	15	1 Drive	15	7.5	400	4500	300	125	150 -1500
		1 Idler	NA	7.5	400	4500	300	125	
SCR 20	20	1 Drive	20	10	400	4500	300	150	150 -1500
		1 Idler	NA	10	400	4500	300	150	
SCR 25	25	1 Drive	25	12.5	500	5000	400	100	150 -1500
		1 Idler	NA	12.5	500	5000	400	100	
SCR 30	30	1 Drive	30	15	500	5000	400	150	150 -1500
		1 Idler	NA	15	500	5000	400	150	
SCR 40	40	1 Drive	40	20	500	5000	400	150	150 -1500
		1 Idler	NA	20	500	5000	400	150	
SCR 50	50	1 Drive	50	25	500	5000	400	200	150 -1500
		1 Idler	NA	25	500	5000	400	200	
SCR 60	60	1 Drive	60	30	600	6000	500	150	150 -1500
		1 Idler	NA	30	600	6000	500	150	
SCR 80	80	1 Drive	80	40	600	6000	500	200	150 -1500
		1 Idler	NA	40	600	6000	500	200	
SCR 100	100	1 Drive	100	50	600	6500	500	250	150 -1500
		1 Idler	NA	50	600	6500	500	250	
SCR 120	120	1 Drive	120	60	800	6500	500	300	150 -1500
		1 Idler	NA	60	800	6500	500	300	
SCR 150	150	1 Drive	150	75	900	7000	600	200	150 -1500
		1 Idler	NA	75	900	7000	600	200	
SCE 200	200	1 Drive	200	100	900	7000	600	200	150 -1500
		1 Idler	NA	100	900	7000	600	200	
SCR 250	250	1 Drive	250	125	1000	7500	600	250	150 -1500
		1 Idler	NA	125	1000	7500	600	250	
SCR 300	300	1 Drive	300	150	1000	7500	600	300	150 -1500
		1 Idler	NA	150	1000	7500	600	300	
SCR 350	350	1 Drive	350	175	1100	8000	700	250	150 -1500
		1 Idler	NA	175	1100	8000	700	250	
SCR 400	400	1 Drive	400	200	1200	8500	700	250	150 -1500
		1 Idler	NA	200	1200	8500	700	250	
SCR 500	500	1 Drive	500	250	1200	8500	700	300	150 -1500
		1 Idler	NA	250	1200	8500	700	300	

**NOTE**


DUE TO CONTINUOUS IMPROVEMENT, WE RESERVE THE RIGHT TO MODIFY THE DETAILS GIVEN

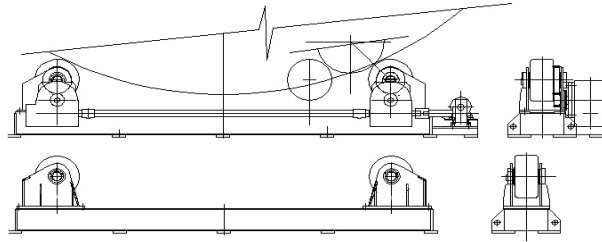

COUPLING SHAFT ROTATOR (SINGLE DRIVE)									
Model	Capacity	No: of unit	Turning	Load brg	Shell diameter		Roller details		Roller, sur- face speed
	Ton		capacity	capacity	Min:	Max:	Dia:	Width	
			Ton	each unit	mm	mm	mm	mm	mm/min
CSR 5	5	1 Drive	5	2.5	400	4000	250	50	150 -1500
		1 Idler	NA	2.5	400	4000	250	50	
CSR 10	10	1 Drive	10	5	400	4000	250	100	150 -1500
		1 Idler	NA	5	400	4000	250	100	
CSR 15	15	1 Drive	15	7.5	400	4500	300	125	150 -1500
		1 Idler	NA	7.5	400	4500	300	125	
CSR 20	20	1 Drive	20	10	400	4500	300	150	150 -1500
		1 Idler	NA	5	400	4500	300	150	
CSR 25	25	1 Drive	25	12.5	500	5000	400	100	150 -1500
		1 Idler	NA	12.5	500	5000	400	100	
CSR 30	30	1 Drive	30	15	500	5000	400	150	150 -1500
		1 Idler	NA	15	500	5000	400	150	
CSR 40	40	1 Drive	40	20	500	5000	400	150	150 -1500
		1 Idler	NA	20	500	5000	400	150	
CSR 50	50	1 Drive	50	25	500	5000	400	200	150 -1500
		1 Idler	NA	25	500	5000	400	200	
CSR 60	60	1 Drive	60	30	600	6000	500	150	150 -1500
		1 Idler	NA	30	600	6000	500	150	
CSR 80	80	1 Drive	80	40	600	6000	500	200	150 -1500
		1 Idler	NA	40	600	6000	500	200	
CSR 100	100	1 Drive	100	50	600	6500	500	250	150 -1500
		1 Idler	NA	50	600	6500	500	250	
CSR 120	120	1 Drive	120	60	800	6500	500	300	150 -1500
		1 Idler	NA	60	800	6500	500	300	
CSR 150	150	1 Drive	150	75	900	7000	600	200	150 -1500
		1 Idler	NA	75	900	7000	600	200	
CSR 200	200	1 Drive	200	100	900	7000	600	200	150 -1500
		1 Idler	NA	100	900	7000	600	200	
CSR 250	250	1 Drive	250	125	1000	7500	600	250	150 -1500
		1 Idler	NA	125	1000	7500	600	250	
CSR 300	300	1 Drive	300	150	1000	7500	600	300	150 -1500
		1 Idler	NA	150	1000	7500	600	300	
CSR 350	350	1 Drive	350	175	1100	8000	700	250	150 -1500
		1 Idler	NA	175	1100	8000	700	250	
CSR 400	400	1 Drive	400	200	1200	8500	700	250	150 -1500
		1 Idler	NA	200	1200	8500	700	250	
CSR 500	500	1 Drive	500	250	1200	8500	700	300	150 -1500
		1 Idler	NA	250	1200	8500	700	300	

**NOTE**

DUE TO CONTINUOUS IMPROVEMENT, WE RESERVE THE RIGHT TO MODIFY THE DETAILS GIVEN

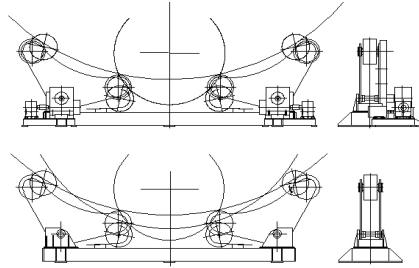

SELF ALIGNING ROTATOR (TWIN DRIVE)									
Model	Capacity	No: of unit	Turning	Load brg	Shell diameter		Roller details		Roller, surface speed mm/min
	Ton		capacity	capacity	Min:	Max:	Dia:	Width	
			Ton	each unit	mm	mm	mm	mm	
SAR 5	5	1 Drive	5	2.5	300	2500	250	50	150 -1500
			1 Idler	NA	2.5	300	2500	250	
SAR 10	10	1 Drive	10	5	400	3000	250	100	150 -1500
			1 Idler	NA	5	400	3000	250	
SAR 15	15	1 Drive	15	7.5	400	3500	300	125	150 -1500
			1 Idler	NA	7.5	400	3500	300	
SAR 20	20	1 Drive	20	10	500	4000	300	150	150 -1500
			1 Idler	NA	5	500	4000	300	
SAR 30	30	1 Drive	30	15	500	4000	400	150	150 -1500
			1 Idler	NA	15	500	4000	400	
SAR 40	40	1 Drive	40	20	600	5000	400	150	150 -1500
			1 Idler	NA	20	600	5000	400	
SAR 50	50	1 Drive	50	25	600	5000	400	150	150 -1500
			1 Idler	NA	25	600	5000	400	
SAR 60	60	1 Drive	60	30	800	5500	500	150	150 -1500
			1 Idler	NA	30	800	5500	500	
SAR 80	80	1 Drive	80	40	900	6000	500	200	150 -1500
			1 Idler	NA	40	900	6000	500	
SAR 100	100	1 Drive	100	50	900	6000	500	150	150 -1500
			1 Idler	NA	50	900	6000	500	
SAR 120	120	1 Drive	120	60	1000	6500	500	175	150 -1500
			1 Idler	NA	60	1000	6500	500	
SAR 150	150	1 Drive	150	75	1000	7000	500	200	150 -1500
			1 Idler	NA	75	1000	7000	500	
SAR 200	200	1 Drive	200	100	1200	7500	500	250	150 -1500
			1 Idler	NA	100	1200	7500	500	
SAR 250	250	1 Drive	250	125	1200	7500	500	300	150 -1500
			1 Idler	NA	125	1200	7500	500	
SAR 300	300	1 Drive	300	150	1400	7500	600	200	150 -1500
			1 Idler	NA	150	1400	7500	600	
SAR 350	350	1 Drive	350	175	1400	8000	600	200	150 -1500
			1 Idler	NA	175	1400	8000	600	
SAR 400	400	1 Drive	400	200	1600	8500	600	250	150 -1500
			1 Idler	NA	200	1600	8500	600	
SAR 500	500	1 Drive	500	250	1600	8500	600	300	150 -1500
			1 Idler	NA	250	1600	8500	600	

**NOTE**

DUE TO CONTINUOUS IMPROVEMENT, WE RESERVE THE RIGHT TO MODIFY THE DETAILS GIVEN